


NOORA

L i g h t i n g E n g i n e e r i n g

MADE WITH LIGHT

OUTDOOR LIGHT

Control All Around

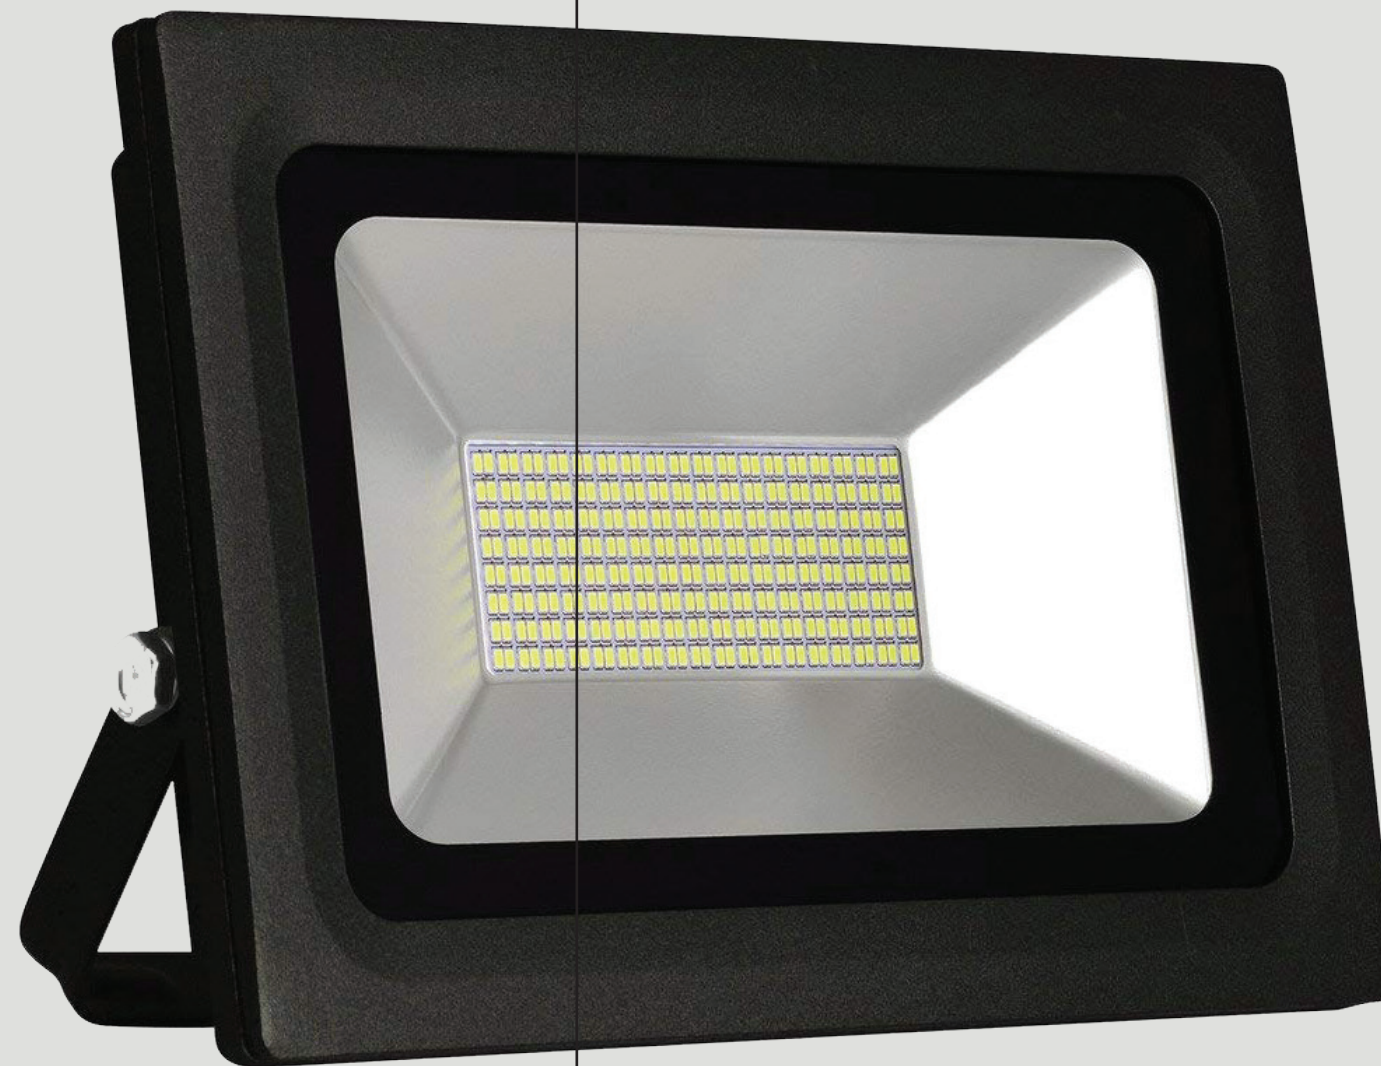

- CASCADE
- LANDA
- DELTA
- NOVA
- SUBTRAN






CASCADE



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NFLC1415	1	15	65	120	≤75	1050	35 x 125 x 140
NFLC1830	1	30	65	120	≤75	2100	35 x 160 x 180
NFLC2560	1	60	65	120	≤75	4200	45 x 230 x 250
NFLC3510	1	100	65	120	≤75	7000	45 x 240 x 350
NFLC5520	1	200	65	120	≤75	14000	60 x 380 x 550
NFLC6050	1	500	65	120	≤75	35000	60 x 380 x 600

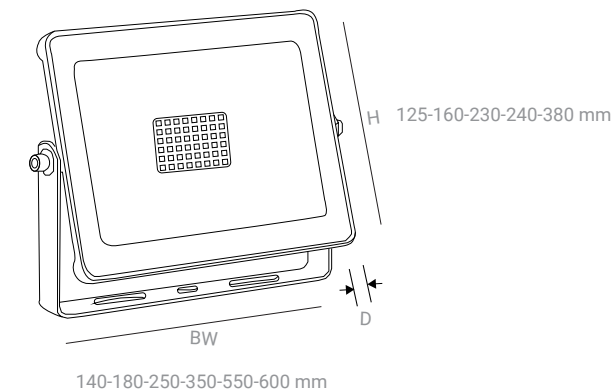


Die cast Aluminium



LANDA



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NJSL1210	1	10	65	5	≤80	850	120 x 70 x 138

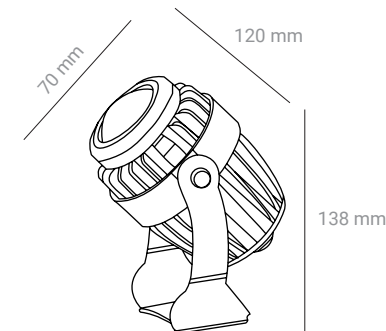


Die cast Aluminium



DELTA



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NSID1405	1	5	65	45	≤75	450	145 x 60 x 43

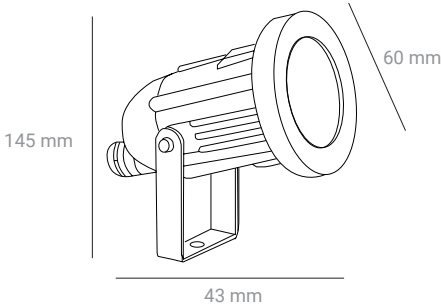

Die cast Aluminium






NOVA



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLN2512	11	12	67	5	≤85	960	95 x 65 x 250
NWLN4021	11	21	67	5	≤85	1680	95 x 65 x 400
NWLN1054	11	54	67	5	≤85	4320	95 x 65 x 1000

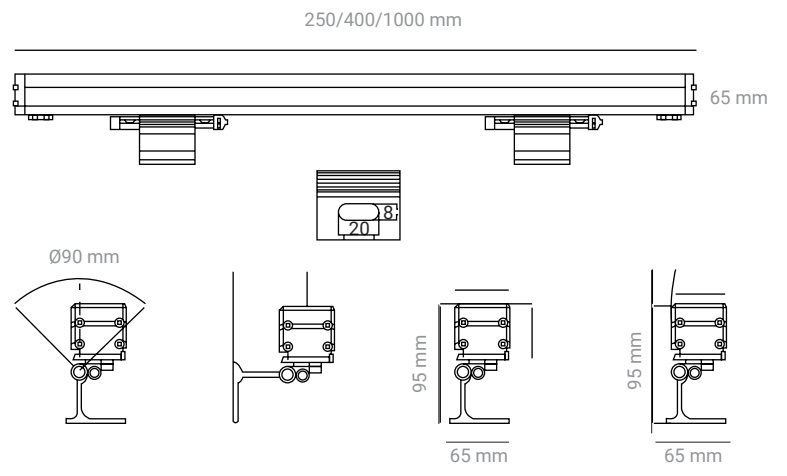

3 YEAR

67°

5°

+85 CRI

II



3000 K

6000 K

GY

MATERIALS: ALMINUM EXTROTION








SUBTRAN



Order NO.	Class	Watt	IP	VOLTAGE	Dimmension (mm) (D-H)
NILS4301	2	1	65	220	70 x Ø43
NILS6503	2	3	65	220	80 x Ø65
NILS1003	2	3	65	220	75 x Ø100
NILS8006	2	6	65	220	90 x Ø80
NILS9021	2	0.2	65	12	36 x Ø25
NILS9022	2	0.6	65	12	55 x Ø32
NILS9024	2	1	65	24	42 x Ø42
NILS9025	2	1	65	12	45 x Ø52
NILS9026	2	1	65	12	45 x Ø52
NILS9027	2	1	65	12	45 x Ø52

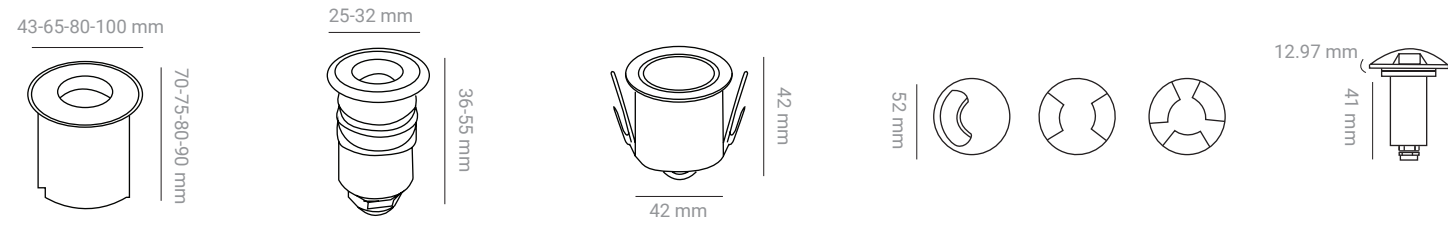



NOORA LIGHTING