




MADE WITH LIGHT

RECESSED PANEL

Out Of The Box

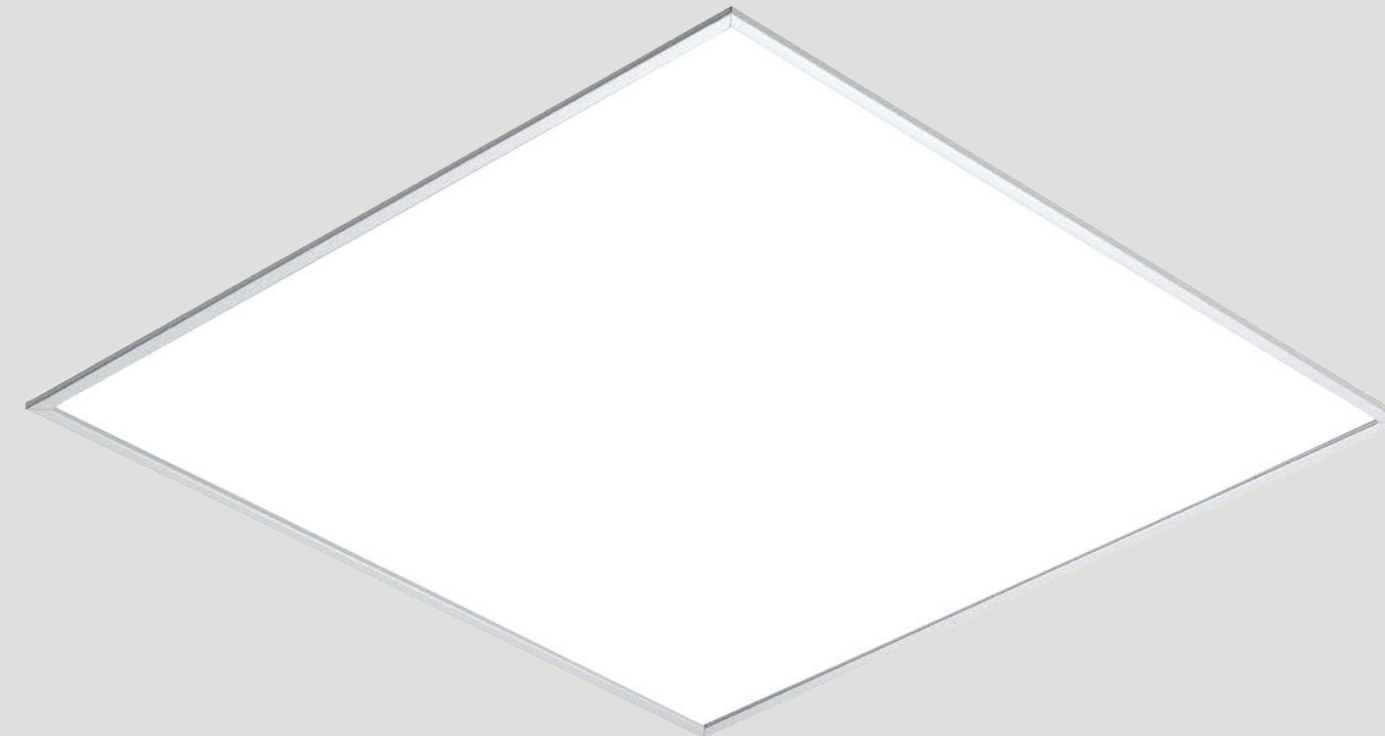


- SKY
- MICRO
- CASPIAN
- ARNO
- RADIANT
- LUMIA





EXPECTONALLY THIN AND LIGHTWEIGHT STRUCTURE

The ultra-slim aluminium costruction aligns the LED chips with the light transmitter. The NOORA is lightweight and easy to handle with maximum strength and durability.

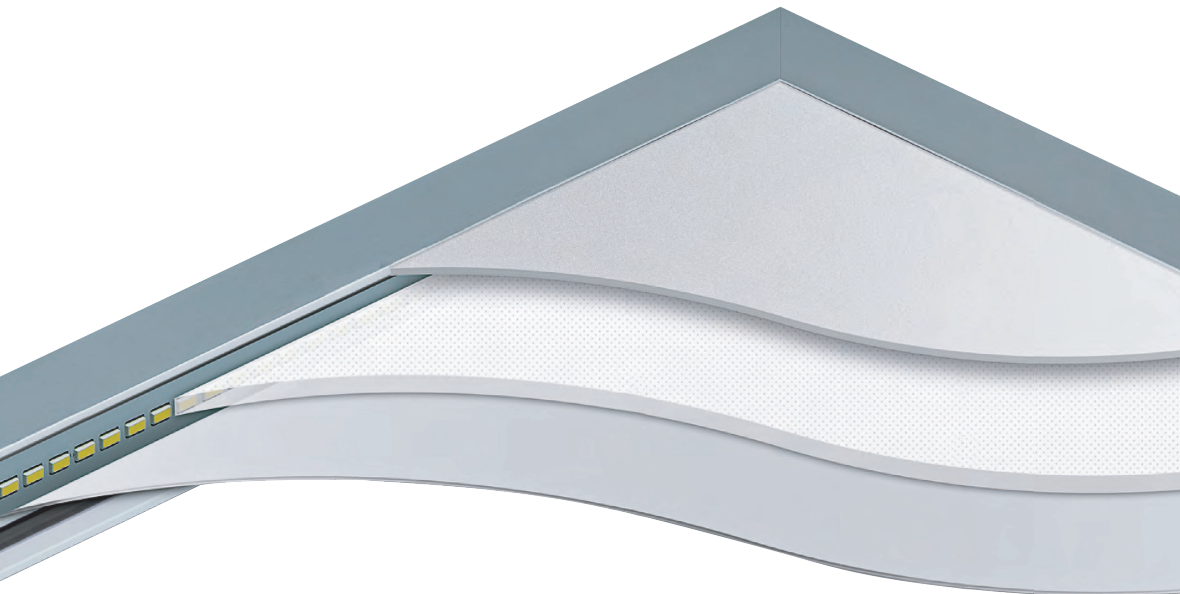

INNOVATIVE LIGHT TRANSMITTER

The surface properties of the light transmitter ensure light moves evenly throughout the fitting. The light pixles covered base directs all the light in to the polycarbonate diffuser.

LIGHT REFLECTOR


The high quality mild steel light reflector ensures that all light is reflected back into the light transmitter.

POLYCARBONATE LIGHT DIFFUSER


The polycarbonate diffuser provides an even light distribution to the room and will not drip hot plastic in the event of a fire, providing extra safety assurance in the workplace.

Smooth, even light sidtribution

Distributes light evenly over entrie surface, preventing hotspots or shadowing.

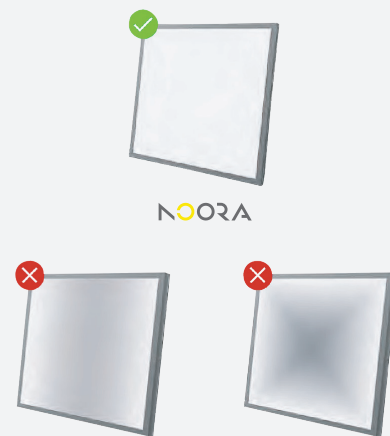

POOR QUALITY LED PANELS




HIGH QUALITY CONSTRUCTION

The construction of NOORA prevents light seeping through joins in the fitting.

Be creative in compositions

LED Panel offers maximum application possibilities.


می‌توانید از ترکیب‌های پیشنهادی شده الهام بگیرید و چیدمان چراغ‌ها را به آن ترتیب که می‌خواهید در فضا ادغام کنید.

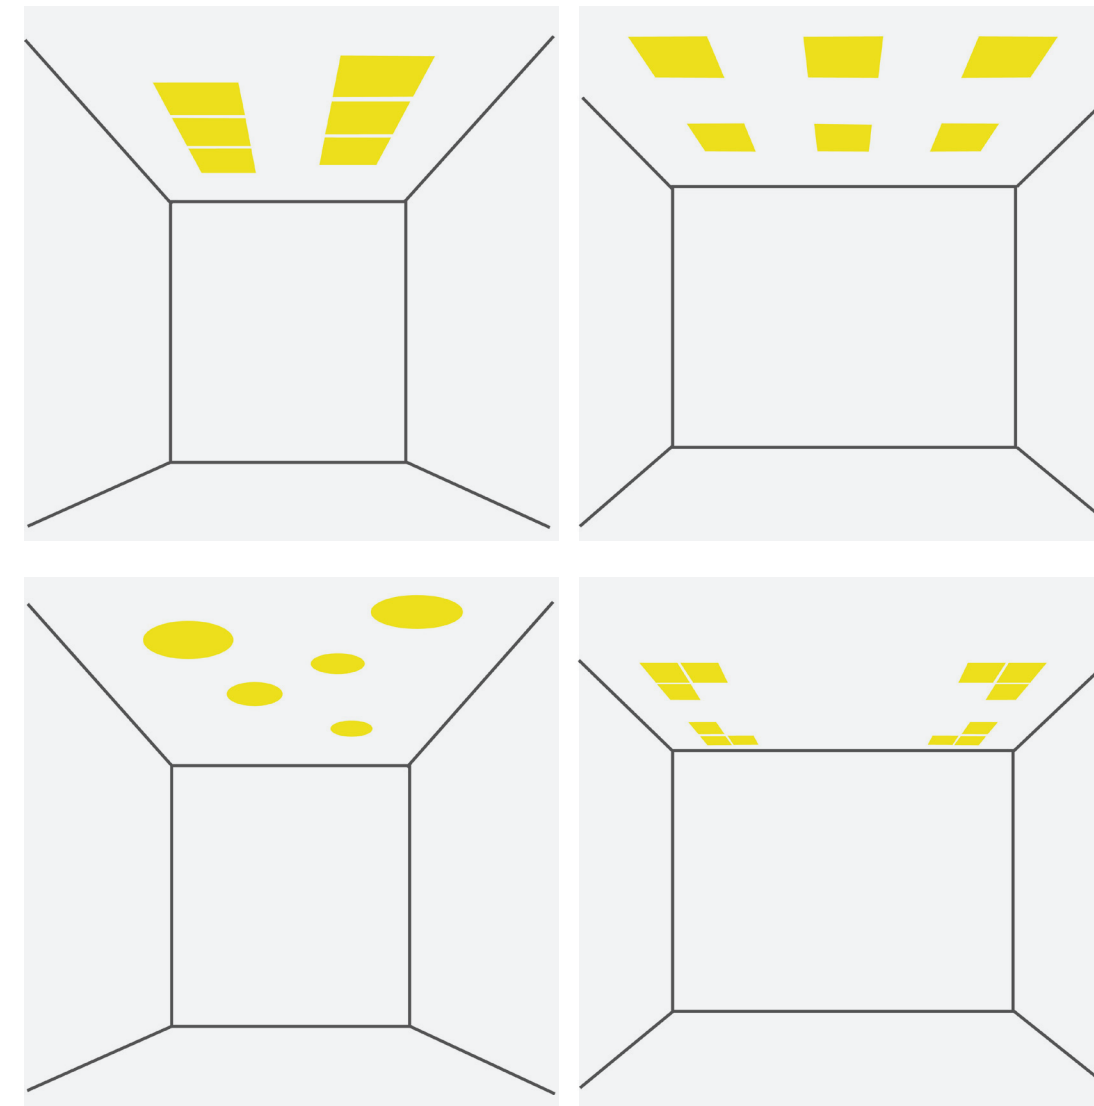





SKY

The Sky Is The Limit



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NSPS3624	1	24	42	120	≤80	1800	15 x 600 x 300
NSPS6640	1	40	42	120	≤80	4400	15 x 600 x 600
NSPS3148	1	48	42	120	≤80	4560	15 x 1200 x 300
NSPS6655	1	55	42	120	≤80	5500	15 x 600 x 600



5 YEAR

42°

120°

+80 CRI

I

3000 K

4000 K

6000 K

WH


Die cast Aluminium



MICRO
Out Of The Box



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NSPM5940	1	40	42	120	≤85	3600	35 x 595 x 595

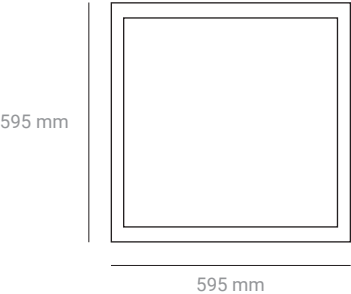

5 YEAR

42°

120°

+85 CRI

I

3000 K

4000 K

6000 K

WH


Die cast Aluminium

recessed





CASPIAN

Office Reviver



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NSPC6024	1	24	42	120	≤80	2160	80 x 600 x 300
NSPC6250	1	50	42	120	≤80	4500	80 x 620 x 620
NSPCI250	1	50	42	120	≤80	4500	80 x 1200 x 300

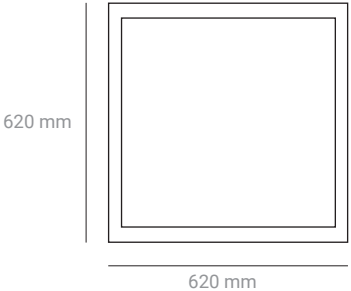

5

YEAR

42

°

120°

+85

CRI

I

III

3000

K

4000

K

6000

K

WH

Die cast Aluminium





ARNO

Clean Room Choice




Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NSPA8503	1	3	42	120	≤75	225	25 x 85 x 85
NSPA1206	1	6	42	120	≤75	450	25 x 120 x 120
NSPA1409	1	9	42	120	≤75	630	25 x 145 x 145
NSPA1612	1	12	42	120	≤75	840	25 x 168 x 168
NSPA2018	1	18	42	120	≤75	1530	25 x 200 x 200
NSPA2924	1	24	42	120	≤75	2040	25 x 290 x 290
NSPA4036	1	36	42	120	≤75	3060	40 x 400 x 400






RADIAN

More Is More

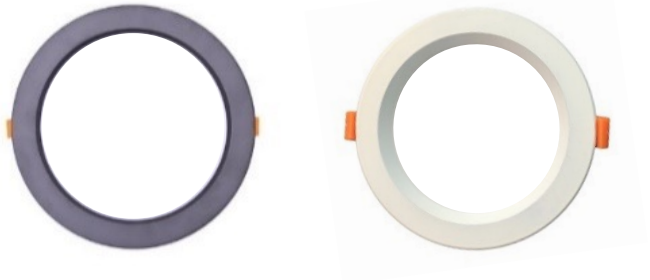

Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NRPR1007	1	7	42	120	≤75	560	30 x Ø100
NRPR1008	1	8	42	120	≤75	645	30 x Ø100
NRPRIP08	1	8	54	120	≤75	645	30 x Ø100
NRPR1010	1	10	42	120	≤75	800	30 x Ø100
NRPRIP10	1	10	54	120	≤75	800	30 x Ø100
NRPR1216	1	16	42	120	≤75	1200	30 x Ø120
NRPR1725	1	25	42	120	≤75	1875	30 x Ø170
NRPR2030	1	30	42	120	≤75	2250	30 x Ø200
NRPR2340	1	40	42	120	≤75	3150	30 x Ø230

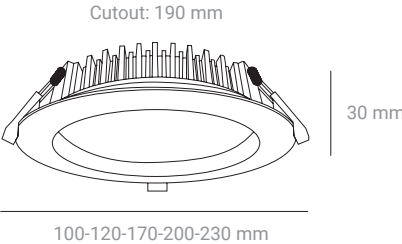

5

YEAR

42

°

54

°

120°

+75

CRI

I

III

3000

K

4000

K

6000

K

BK

GY

WH

Die cast Aluminium






LUMIA
Thin Performer



Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NRPL0908	1	8	42	120	≤75	640	25 x Ø90
NRPL1415	1	15	42	120	≤75	1200	25 x Ø140
NRPL1720	1	20	42	120	≤75	1600	28 x Ø170
NRPL2224	1	24	42	120	≤75	1920	30 x Ø220

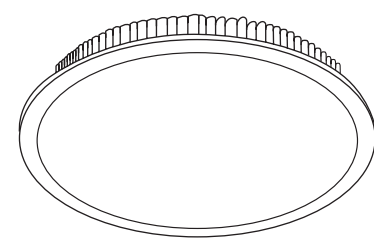

90-140-170-220 mm



NOORA LIGHTING