

WALL MOUNTED

Dirrectly Indirect





- DERSIA

- ANTIQUE

- JASPER

- APOLON



- MARS

- METIS

- DION

- JUPITER

- TITAN











Be creative in compositions

Outdoor lights offers maximum application possibilities.

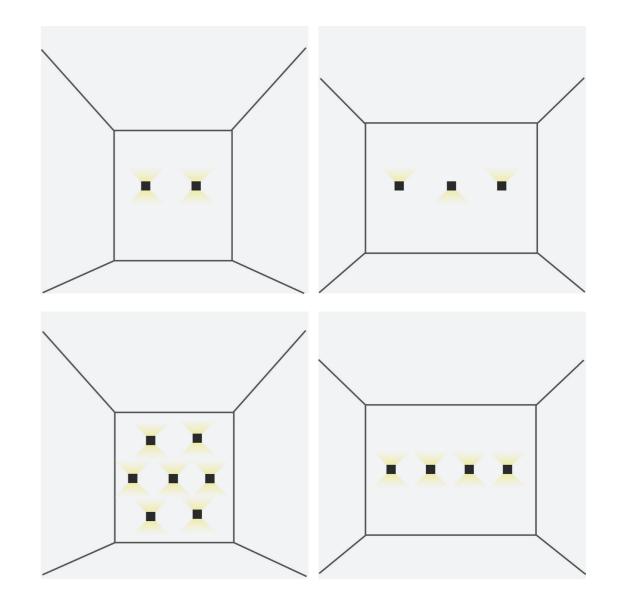


/ DORSA

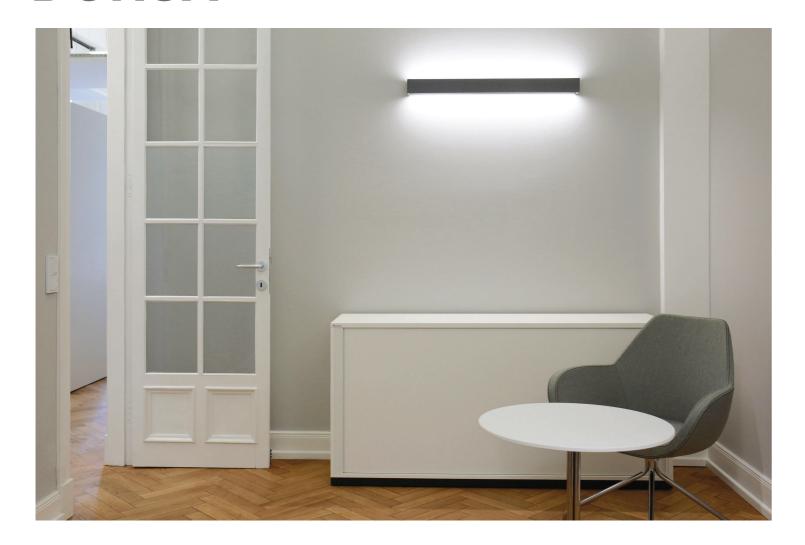






Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLD1005	1	5	42	100	≤80	380	80 x 100 x 100
NWLD2010	1	10	42	100	≤80	760	80 x 100 x 200
NWLD3015	1	15	42	100	≤80	1140	80 x 100 x 300
















/ DERISA





Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLD1506	1	6	42	100	≤80	570	53 x 100 x 150
NWLD2712	1	12	42	100	≤80	1140	53 x 100 x 270
NWLD3918	1	18	42	100	≤80	1710	53 x 100 x 390
NWLD5224	1	24	42	100	≤80	2280	53 x 100 x 320












/ ANTIQUE / JASPER








Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLA2412	2	12	55	120	≤80	1200	245 x 80 x 120





Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLJ1502	1	2*1	55	10X70	≤80	240	150 x 50 x 78












/ APOLON





Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLA1403	1	3	55	120	≤80	300	148 x 35 x 148






















/ DION






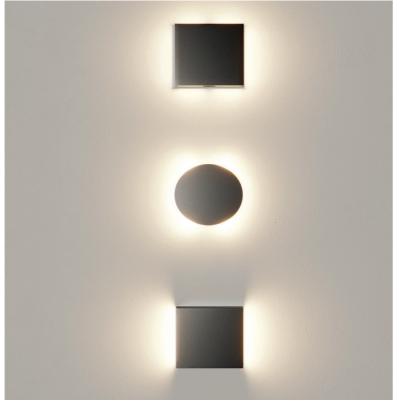




Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (D-H)
NWRM1507	1	7	55	120	≤80	700	Ø150 x 50






Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWSM5007	1	7	55	120	≤80	700	50 x 150 x 150





Order NO.	Class	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLD9002	1	2	55	120	≤80	120	90 x 40 x 90








Die cast Aluminiu








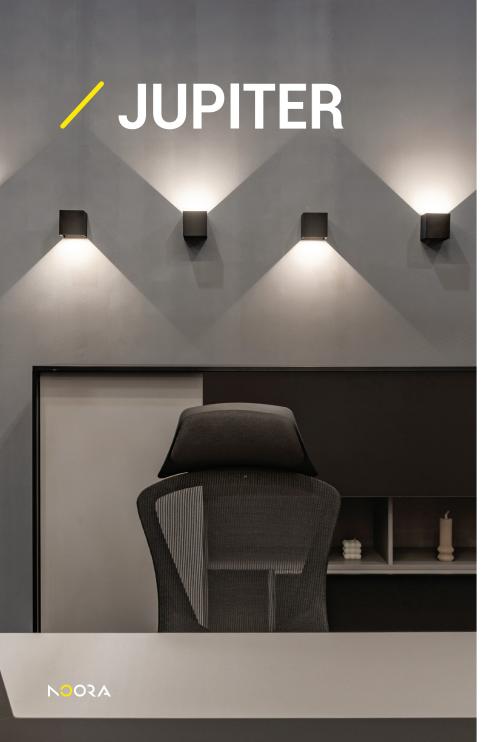






Order NO.	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLT1606	2*3	55	120	≤80	540	160 x 65 x 90





Order NO.	Watt	IP	Angle (°)	CRI	Lumen	Dimmension (mm) (H-W-L)
NWLJ1006	6	65	Adjustable	≤80	460	100 x 100 x 100













IP Rating Chart

IP ratings are represented by combining the first and second digits of the following columns. See example below.

1st Digit - SOLID

Degree of protection against solid objects

2nd Digit - LIQUID

Degree of protection against water































